




HYDRAULIC INBUILT PULLER

Use with 2 & 3  
Jaw Pullers  
Capacity 4-30 Ton

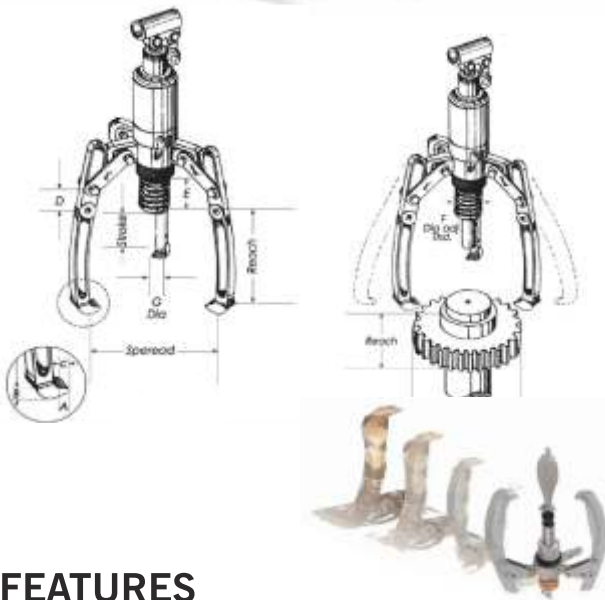

FEATURES

- Comes with 2/3 jaws combination puller head..
- Broad capacity range of 4,6,8, and 15 tons
- Integrated safety valve for overload protection..
- Spring loaded hydraulic cylinder rod.
- Removable and 360° rotary pump handle.
- High quality, heat treated forged alloy steel components provide superior reliability and service.
- Have been vigorously tested for top performance and perfection.

- Light weight and compact design.
- Comes with fast adjusting nut for rapid adjustment.
- Supplied with sturdy storage case.
- The perfect shape and structure for puller jaws.
- Comes with 2/3 jaws combination puller head.
- Broad capacity range of 10,12,20,25 and 30 tons.
- Integrated safety valve for overload protection.
- High quality, heat treated forged alloy steel components provide superior reliability and service.
- Extra long jaws for added capability of pulling a wider variety of parts (some models only)
- Available with or without full hydraulic set.

Model Number	Capacity (Ton)	Stroke A (mm)	Reach (mm)	Spread (mm)	Tip			Weight (kg)
					B	C	D	
CK-4	4	60	185	255	42	22	84	6.7
CK-6	6	70	220	330	45	23	94	7.4
CK-8	8	85	230	350	50	25	122	8.2
CK-10	10	85	270	375	60	28	118	10.9
CK-12	12	85	270	375	60	28	118	10.9
CK-20	20	111	360	520	80	40	160	34.7
CK-30	30	111	360	550	98	50	155	46.7