




PUSH PULLERS

4-12 TON
SELF CONTAINED
HYDRAULIC PULLER

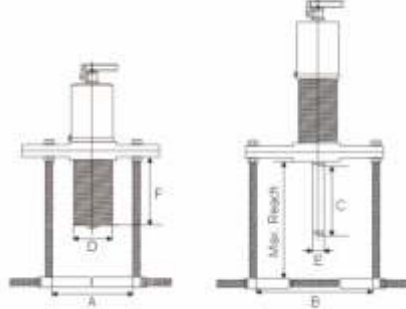

FEATURES

- Self-contained Hydraulic Puller, no need for extra hand pump, hose and coupling, allows operating by one person.
- 360° Rotary handle swivel clevis allows pumping at all directions.
- Safety valve minimizes the risk of the puller overload by limiting the applied force
- Complete hydraulic puller allows effortless generation of force and dismounting.
- The spring-loaded centre point of the hydraulic spindle allows easy centering the puller on the shaft.
- Forging parts and special treatment provide long life service and the best strength

Hydraulic
Push Puller

Model Number	Capacity (Ton)	Stroke A (mm)	Reach (mm)	Spread (mm)		Tip			Weight (kg)
				A	B	D	E	F	
CK-401	4	60	250	75	110	42	22	84	7.6
CK-601	6	70	270	95	180	45	23	92	11.0
CK-801	8	85	270	95	220	50	25	122	14.3
CK-1201	12	85	381	120	290	60	28	118	23.8

Model Number	Spread (mm)	Dimension				Weight (kg)
	C	A	B	D	E	
BA-9005	5-60	70	125	17.5	3/8-24UNF	0.6
BA-9010	15-60	100	135	21.5	1/2-20UNF	1.4
BA-9015	12-70	130	163	27.5	5/8-18UNF	2.5
BA-6	28-150	170	275	34	3/4-16UNF	5.5
BA-9035	20-200	240	350	39	1-14UNF	8.5
BA-9035A	20-200	200	360	36.5	7/8-14UNF	11.0

